


SERIES: Boiler Tube Alignment Clamp

Tube alignment clamps that speed waterwall boiler tube fit-up and helps reduce tube joint failure due to misalignment

Made in the USA

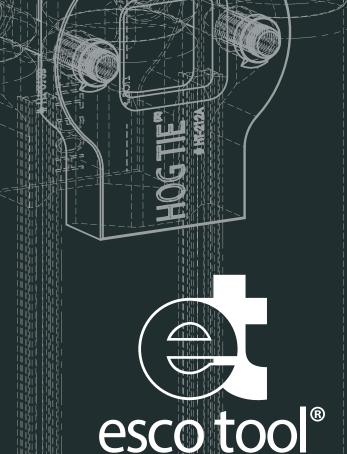

DELIVERING CUTTING EDGE INNOVATION

HOG TIE® Boiler Tube Alignment Clamp

Aligns Boiler Tube Ends for Accurate Welding

Key Features

- · Aligns tube ends quickly for tube joint tack welding
- Ideal for waterwall, economizer, header, crossover, superheat, reheat, and generating tubes
- Speeds boiler tube waterwall welding process
- Reduces the risk of costly tube joint failure due to misalignment
- Safety Lanyard easily connects clamp halves for fall protection
- Made of high strength precision machined steel for long service
- For tube sizes 1.125" (28.757mm) O.D. to 3.250" (82.55mm) O.D.
- Threaded inserts are replaceable
- · Available kits come with everything needed
- · Set-up is easy and fast
- Saves time and money
- For Sale and Rent



The HOG TIE® boiler tube joint alignment clamps speed the welding process for boiler tube waterwall panel replacement by quickly and accurately aligning new boiler tube ends with existing tubes in preparation for creating welded tube joints.

The two piece design is simple and easy to use. One piece has a through hole and the other has a threaded replaceable insert. Bolts draw the assembly together. Each bolt passes through the through hole and threads into the threaded insert. With the two tube ends between the HOG TIE® assembly, the tack weld window on each HOG TIE® piece is centered. When the bolts are tightened, it draws the tube ends into alignment.

During this process, adjustments can be made to ensure a proper gap is maintained between the tube ends before tack welding them. After the HOG TIE® is removed, the tack weld holds the tube ends in alignment, allowing for full access to the tube joint in order to complete the tube joint weld.

Accurate tube end alignment helps to make a better welded tube joint and reduces the risk of tube joint failure due to inaccurate alignment which saves time and money on costly boiler shut-down and re-work.

The HOG TIE® alignment tool can also be used in other applications requiring accurate alignment for tube and pipe welding. It is made of precision machined high strength steel for long service and is available for tube sizes from 1.125" (28.6mm) O.D. to 3.250" (82.6mm) O.D.



Available HOG TIE® kits include an impact tool, 7/8" socket, safety lanyard, spare bolts, spare threaded inserts and carrying case.



HOG TIE® tube alignment tools speed waterwall boiler tube fit-up and helps reduce tube joint failure due to misalignment.



Available impact wrench draws the HOG TIE® assembly together for fast tube end alignment.



HOG TIE® assemblies are designed for use on boiler tube waterwall panels with 0.5" / 12.7mm wide membrane. For other pipe and tube applications please consult factory.

HOGTIE®

Available Sizes*

DOUBLE TUBE HOG TIE® (single bolt)

Designed for 1/2" / 12.7mm membrane



Tube Size: **1-1/8" / 28.6mm**Part #: HT-11812

Dim: 6" x 3" / 152.4mm x 101.6mm

Weight: 9 lbs / 4.08 kgs



Tube Size: **1-1/4" / 31.75mm**Part #: HT-11412

Dim: 6" x 3" / 152.4mm x 76.2mm

Weight: 9 lbs / 4.08 kgs



Tube Size: **1-3/8" / 34.9mm**Part #: HT-13812

Dim: 6" x 3-1/2" / 152.4mm x 88.9mm

Weight: 10 lbs / 4.54 kgs



Tube Size: **1-1/2" / 38.10mm**Part #: HT-11212

Dim: 6" x 3-1/2" / 152.4mm x 88.9mm

Weight: 10 lbs / 4.54 kgs

Standard / Optional Kit Contents

Bolt w/ Washer Part # 123-2872



Bolt & Washer Part # 123-2864





Bolt w/ Washer Part # 123-2856



Bolt w/ Washer Part # 123-2484



Threaded Insert Part # HT-X002



Safety Lanyard (for fall protection) Part # HT-X007



Impact Tool Part # HT-X003 (Optional)

7/8" Socket Part # HT-X004 (Optional)

HOG TIE® Clamp Selector Chart and Corresponding Hardware

Hog Tie Series	Tube O.D.		Bolt Length		Bolt	Washer	Threaded
	in	mm	in	mm	Part #	Part #	Insert Part #
HT-11812	1-1/8	28.6	4	101.6	123-2864	165-001	HT-X002
HT-11412	1-1/4	31.8	4	101.6	123-2864		
HT-13812	1-3/8	34.9	4	101.6	123-2864		
HT-11212	1-1/2	38.1	4	101.6	123-2864		
HT-134	1-3/4	44.5	3	76.2	123-2484		
HT-200	2	50.8	3-1/2	88.9	123-2856		
HT-214	2-1/4	57.2	3-1/2	88.9	123-2856		
HT-238	2-3/8	60.3	4	101.6	123-2864		
HT-212	2-1/2	63.5	4	101.6	123-2864		
HT-234	2-3/4	69.9	4	101.6	123-2864		
HT-300	3	76.2	4-1/2	114.3	123-2872		
HT-314	3-1/4	82.6	4-1/2	114.3	123-2872		

SINGLE TUBE HOG TIE® (double bolt)

Designed for minimum 1/2" / 12.7mm membrane



Tube Size: **1-3/4" / 44.5mm**Part #: HT-134

Dim: 6" x 3-1/4" / 152.4mm x 82.6mm

Weight: 7.5 lbs / 3.4 kgs



For Tube Size: **2" / 50.8mm**Part #: HT-200

Dim: 6" x 4" / 152.4mm x 101.6mm

Weight: 7.5 lbs / 3.4 kgs



For Tube Size: **2-1/4" / 57.2mm** *Part #: HT-214*Dim: 6" x 4" / 152.4mm x 101.6mm

Weight: 8 lbs / 3.63 kgs



For Tube Size: **2-3/8" / 60.3mm**Part #: HT-238

Dim: 6" x 4-3/8" / 152.4mm x 111.1mm

Weight: 8 lbs / 3.63 kgs



For Tube Size: **2-1/2" / 63.5mm**Part #: HT-212

Dim: 6" x 4-3/8" / 152.4mm x 111.1mm

Weight: 8 lbs / 3.63 kgs



For Tube Size: **2-3/4" / 69.9mm**Part #: HT-234

Dim: 6" x 4-3/8" / 152.4mm x 111.1mm

Weight: 8 lbs / 3.63 kgs



For Tube Size: **3" / 76.2mm**Part #: HT-300

Dim: 6" x 4-3/4" / 152.4mm x 120.7mm

Weight: 10 lbs / 4.54 kgs



For Tube Size: **3-1/4" / 82.6mm** *Part #: HT-314* Dim: 6" x 4-3/4" / 152.4mm x 120.7mm Weight: 10 lbs / 4.54 kgs

Standard and Optional Kit Contents

Available HOG TIE® kits come with the following...

- Threaded Insert Clamp Half (side A)
- Through Hole Clamp Half (side B)
- Safety Lanyard (for fall protection)
- Bolt w/ washer (x2 for single tube HOG TIE®)
- Spare Bolt w/ washer (x2 for single tube HOG TIE®)
- Spare Threaded Insert (x2 for single tube HOG TIE®)
- 1/2" Drive Impact Tool w/ 7/8" Socket (OPTIONAL)

^{*}consult factory for special sizes

MILLHOG®

Portable Tools for Cutting, Beveling and Facing Tube, Pipe and Flanges





Manufacturer and Market Leader *Delivering Cutting Edge Innovation*



Contact us or your local representative to schedule a demo today

esco tool®

ESCO TECHNOLOGIES, INC.

75 October Hill Road • Holliston, MA 01746 USA 1.508.429.4441 • fax 1.508.429.2811 email: millhog@escotool.com

Available for Sale or Rent • www.escotool.com